


UV Sterilizer

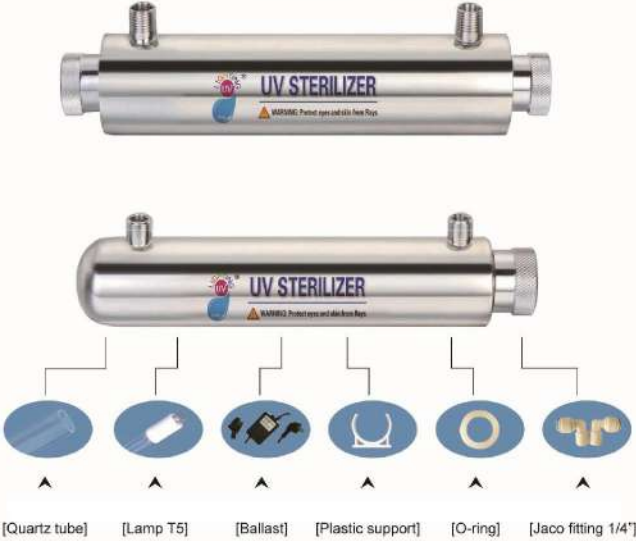


Functions:Stainless steel UV sterilizer is a widely used water disinfection and purification system which can effectively disinfect bacteria, viruses and molds etc.(better effect after water purifier) The sterilizing rate is as high as 99.99%.The stainless steel meets EU environmental standard,healthy,environmental protecting and no harmful chemical substance include.
Features:easy,economical,fast,safe,no secondary pollution
Applications:drinking water,public places, food processing etc.
Please read owner's manual carefully before beginning installation or operation.

Note:
• Philips lamps are optional.
• Customization is acceptable.
• 316SS is optional.
• Internal mechanical or electrolytic polishing is optional for stainless steel tube.

■ Ultraviolet (UV-C rays/253.7nm) water disinfection system is a unique and fast method of water sterilization to effectively destroy bacteria, viruses, molds and algae.

型号 Model	SS 6W	SS 12W	SS 16W	SS 25W	SS 30W	SS 35W	SS 55W
外壳材料 Housing material	#304/316	#304/316	#304/316	#304/316	#304/316	#304/316	#304/316
T5灯管功能 ALL UV lamp(T5)power	6W	12W	16W	25W	30W	35W	55W
输入电压 Input voltage	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz
灯管数量 UV lamp quantity	1	1	1	1	1	1	1
流量 Water treatment capability	0.5GPM (0.1M³/Hr)	1GPM (0.2M³/Hr)	2GPM (0.4M³/Hr)	6GPM (1.4M³/Hr)	8GPM (1.8M³/Hr)	10GPM (2.3M³/Hr)	12GPM (2.7M³/Hr)
容积 Water capacity	421cm³	502cm³	990cm³	1687cm³	2684cm³	2810cm³	2810cm³
最大操作压力 Max operating pressure	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)
测试压力 Test pressure	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)
故障报警 Lamp failure alarm	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional
灯管使用寿命 Lamp life	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs
产品尺寸 Product size	A 270mm	310mm	375mm	595mm	910mm	950mm	950mm
	B 63mm	63mm	82mm	82mm	85mm	85mm	85mm
	G 1/4"female	1/4"female	1/2" male	1/2" male	3/4" male	3/4" male	1" male
	ø 50.8mm	50.8mm	63.5mm	63.5mm	63.5mm	63.5mm	63.5mm

UV Sterilizer In Large Power -

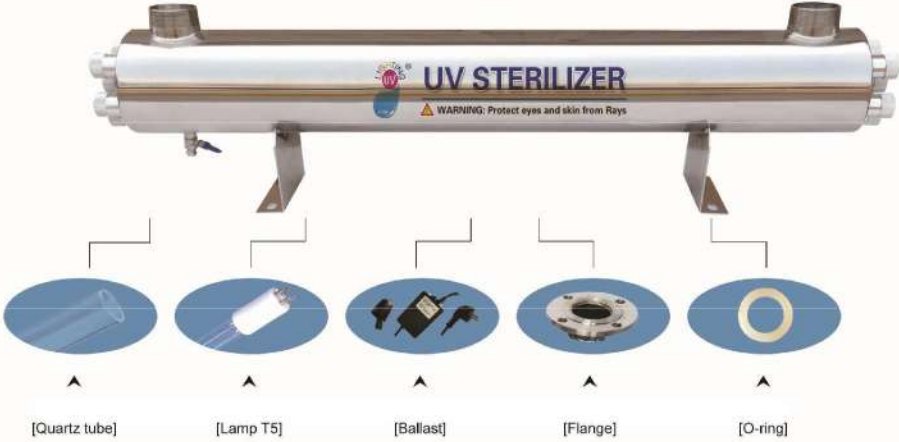

■ Ultraviolet (UV-C rays/253.7nm) water disinfection system is a unique and fast method of water sterilization to effectively destroy bacteria, viruses, molds and algae.

型号 Model	SS 110W	SS 165W	SS 220W	SS 330W	SS 440W	SS 550W	SS 660W
外壳材料 Housing material	#304/316	#304/316	#304/316	#304/316	#304/316	#304/316	#304/316
T5灯管功能 ALL UV lamp(T5)power	110W	165W	220W	330W	440W	550W	660W
输入电压 Input voltage	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz
灯管数量 UV lamp quantity	2	3	4	6	8	10	12
流量 Water treatment capability	24GPM (5.5M³/Hr)	36GPM (8M³/Hr)	48GPM (11M³/Hr)	72GPM (16M³/Hr)	96GPM (22M³/Hr)	120GPM (30M³/Hr)	144GPM (35M³/Hr)
容积 Water capacity	8130cm³	12330cm³	12330cm³	19674cm³	33739cm³	33739cm³	33739cm³
最大操作压力 Max operating pressure	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)
测试压力 Test pressure	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)
故障报警 Lamp failure alarm	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional
灯管使用寿命 Lamp life	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs	8000Hrs
产品尺寸 Product size	A 950mm	950mm	950mm	950mm	950mm	950mm	950mm
	B1 250mm	283mm	283mm	380mm	430mm	430mm	430mm
	B2 270mm	305mm	305mm	380mm	470mm	470mm	430mm
	G 1"(male/flange)	1 1/2" (male/flange)	2" (male/flange)	2" (male/flange)	3" (male/flange)	3" (male/flange)	3" (male/flange)
包装数据 Carton size/pcs	104*23*41cm/1pc	104*25*45cm/1pc	104*25*45cm/1pc	104*30*54cm/1pc	104*37*64cm/1pc	104*37*64cm/1pc	104*37*64cm/1pc
毛重 G.W.	8kgs	11kgs	11.5kgs	25kgs	27kgs	28kgs	29kgs